

DÉSA⁸

Digital Video Recorders



Security Systems



Formerly known
as Philips CSI

- Windows[®] 2000-based Digital Recorder
- Average File Size 3–6 KB
- 120 IPS Frame Rate
- Remote Multiserver Access
- Limited Remote Administration
- Local & Remote PTZ Control
- Local & Remote Intelligent Search Engine
- Watermarking
- E-mail Notification
- Event Logging by User
- Web Browser Interface

The Bosch DÉSA⁸ is a Windows 2000-based digital recorder that produces an amazing 120 images per second, with average file sizes of 3–6 KB per image. This unit has eight video inputs with independently configurable frame rate settings. The DÉSA⁸ features four alarm inputs and four auxiliary outputs.

When an alarm is triggered, notification (via e-mail or remote) is sent to an administrator, providing remote event notification. On activation of alarms, the DÉSA⁸ may be configured to execute pre-positions from multiple AutoDome[®] cameras. The DÉSA⁸ has pre-alarm recording capability, allowing video capture *prior* to an alarm event. There are also five configurable motion detection zones per camera.

Both live and recorded video are accessible via the included remote viewing software. The remote software also provides PTZ control and limited system configuration, supporting up to 16 DÉSA⁸ units. Video is easily offloaded and distributed as proprietary or AVI files using the standard CD-RW.

Local PTZ control is accomplished directly via the user interface, providing complete control over the Bosch AutoDome Series¹. Other manufacturers' units are also supported².

Secure operation is achieved via fully definable users, assigned to grant or deny access to system administration functions, recorded video access, PTZ control, and live view cameras. The advanced scheduling feature of DÉSA⁸ allows customization of recording parameters based on time, day of the week, motion, and alarm input. The DÉSA⁸ is easily configured to record based on your unique needs!

The E-Map feature provides the capability to load a bitmap image of your facility, then select and drop camera and alarm icons to create an overview of your installation. Simply click on the E-Map's camera icons to view video from the selected camera.

Single channel audio recording is available by connecting an audio source to the unit. The DÉSA⁸ also supports two way audio, for listening in and talking to the site using the remote viewing software.

NOTES: ¹RS-232 to Biphase converter required.

²Additional hardware may be required.

Specifications

| | |
|-------------------------|-------------------------------|
| Model | DR081xx |
| Composite Output | Full Screen/Seq |
| Display (Max) IPS | 120 |
| Video Input-Cameras | 1 to 8 |
| Digital Audio Recording | 1-channel |
| External Alarm | 4/4 (Input/Auxiliary Output) |
| SVGA Display | 1024 x 768 |
| Standard HDD | 120, 250, 500 GB |
| Memory | 512 MB |
| Recording Speed | 320 x 240 / 120 IPS |
| | 640 x 480 / 120 IPS (maximum) |

Average Record Days Disk format (GB) / Recording Speed (IPS)

| DR081xx | Total IPS | Continuous Recording | 15% Motion Recording |
|----------------|----------------------|---------------------------------|---------------------------------|
| 120 GB | 8 | 60 days | 360 days |
| 120 GB | 120 | 4 days | 24 days |
| 250 GB | 8 | 120 days | 720 days |
| 250 GB | 120 | 8 days | 48 days |
| 500 GB | 8 | 240 days | 1440 days |
| 500 GB | 120 | 16 days | 96 days |

NOTE: The above record calculations are examples based on continuous or motion at 15% recording, with 320 x 240 resolution, and an average of 3 KB file size at normal quality setting.

Electrical

| | |
|---------------------|---|
| Power Supply | Pentium-4 Power Supply |
| | Selectable 115-230 VAC 60-50 Hz |
| | 380 W (400 W Max) |
| | It is highly recommended to us a UPS (Uninterrupted Power Supply) |

Video

| | |
|--------------------|--------------------------------------|
| Display Resolution | 160 x 120, 320 x 240, 640 x 480 NTSC |
| Input | 1 Vp-p composite video signal, 75 Ω |
| Composite Output | 1 Vp-p composite video signal, 75 Ω |

| | |
|-------------|---------------|
| SVGA | One (1) DB 15 |
|-------------|---------------|

| | |
|--------------|---------------------------------------|
| Audio | 1-channel (line in, mic in, line out) |
|--------------|---------------------------------------|

Connectors

| | |
|------------------------|--------------------------|
| Video Input | BNC |
| Composite Video Output | RCA |
| Audio | 1/8-inch mini phone jack |
| 10/100 MB Ethernet | RJ-45 |

Alarms

| | |
|----------------------------|---|
| Alarm Inputs | Four (4) programmable N/O, N/C dry contacts |
| Alarm Outputs ¹ | Four (4) programmable output relays |

| | |
|--------------------------|---|
| Image Compression | Proprietary temporal compression (Based on enhanced MJPEG and H.263 compression technology) |
|--------------------------|---|

| | |
|------------------------|--|
| Image Integrity | Proprietary Codec, time/date stamp, watermark authentication |
|------------------------|--|

| | |
|-----------------|---------------|
| VGA Card | AGP 64 MB RAM |
|-----------------|---------------|

Resolution/Average File Size²

| | |
|--|-----------------------------------|
| | 160 x 120/1.5 KB; 320 x 240/3 KB; |
| | 640 x 480/6 KB |

| | |
|--------------------|---|
| PTZ Control | One (1) RS-422, one (1) RS-232 ³ output supplied |
|--------------------|---|

NOTES:

¹Specifications on back page

²Average file size based on temporal refresh

³LTC 8786/60 Series Data Converter is required for RS-232 conversion to biphas

NOTE: Biphas and Pelco[®] protocols have been tested and verified. All other protocols have yet to be tested.

Remote PC Requirements

Processor Pentium[®] III, Pentium 4, or AMD,
1 GHz minimum

Memory 256 MB minimum, 512 MB recommended for
Drag and Drop feature

Video Dedicated AGP Graphics Adapter,
32 MB RAM minimum (64 MB recommended),
32 bit color or better

CAUTION: Recommended graphics boards are ATI Radeon or nVidia GeForce. The software does not support video cards based on SiS or Riva TnT2 chip sets.

The system does not support onboard, integrated graphics adapter with shared memory.

Monitor SVGA or XVGA set to 1024 x 768 resolution
at 60 Hz refresh rate

Hard Disk 500 MB free disk space

Operating System Windows NT 4.0 SP6,
Windows 2000 Pro SP3, or Windows XP Pro

Browser Internet Explorer 5.5 or greater

NOTE: When installing the Remote Client software on Windows NT 4.0, it is important to upgrade Windows Scripting to version 5.2 or greater. Versions below 5.2 cause installation issues.

Mechanical

Tower Dimensions 208.3 x 467.4 x 435.6 mm
(8.2 W x 18.4 D x 17.2 H in)

Tower Weight 11.3 - 20.4 Kg (25 - 45 lb) based on model

Environmental

Temperature Operating: 5° to 40° C (41° to 105° F)
Storage: 5° to 40° C (41° to 105° F)

Relative Humidity 0 to 90%, noncondensing

Product Regulatory Compliance

Electromagnetic Compatibility (EMC)

Complies with FCC Part 15 and ICES-003

Product Safety Complies with UL and CSA Standards

Warranty

3 years

Bosch Accessories (Optional)

LTC 8786/60 – RS-232 to biphase converter

S1363-BNC-RCA Converter

Approved Accessories (Third Party Manufacturers)

StarTech.com (Starview) KVMs

Any UPS (Uninterruptable Power Supply)


Norton AntiVirus™

McAfee VirusScan

Ordering Information


Use the chart below to create your part number, based on this

example:

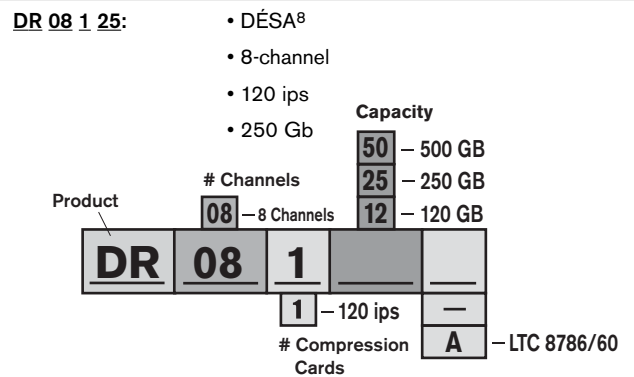

DÉSA⁸ Part Numbering Structure

Windows[®] and Windows NT[®], are registered trademarks of Microsoft Corporation.
Pentium[®] is a registered trademark of Intel Corporation.
Norton Antivirus™ is a trademark of Symantec Corporation.
McAfee is a business unit of Network Associates, Inc.



Bosch Security Systems, Inc.
850 Greenfield Road
Lancaster, PA 17601
Tel: 800-326-3270
Fax: 717-735-6560
www.boschsecuritysystems.com

BOSCH